



SoftTie® SL SINGLE LOCK

SoftTIE SL is the perfect solution for easily bundling objects of any kind. After fixing the object, the remaining tape can be passed through a loop-back hole to ensure a secure hold, even in demanding situations.




SoftTie® DL DOUBLE LOCK

SoftTIE DL is the perfect solution for binding two objects together. The double lock system makes it possible to add another object after the first binding. The SoftTIE can also be reused countless times.



SoftTie® C COMPACT

SoftTIE C is the compact solution for long-term mounts. Due to the new compact lock design, we can guarantee the highest possible holding forces within minimal space requirements.

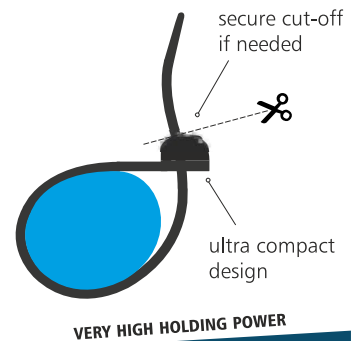

lock design

single lock

double lock

compact

resuable



UV-resistant



material

TPU

TPU

TPU

operating temperature

-20°C to +85°C

-20°C to +85°C

-20°C to +85°C

stress resistance

400%

400%

400%

flame class rating


UL 94 HB

UL 94 HB

-


UL 94 HB

color



black

for technical applications



black

for technical applications



green

designed for gardening and landscaping



black

for technical applications

short description

The SoftTIE is the leading mounting solution for a secure and gentle hold of any goods. It's made of a high performance material, which has unique elastic properties. The elastic material allows to apply some initial stress, which holds even very smooth objects safe in place, especially during any kind of movement.

field of application



automotive industry



robotic



gardening & landscaping



electrical industry



engineering



security and defence



telecommunication




research institutes



wind turbines




SoftTie® SL				properties			package size			color
order-no.	type	b	L	bundle Ø	min. force	weight	small	medium	large	
10718 - __	7/180	7	180	45 mm	56 N	2,2 g	10 pcs.	50 pcs.	1000 pcs.	
10726 - __	7/260	7	260	70 mm	56 N	2,9 g	10 pcs.	50 pcs.	1000 pcs.	
11126 - __	11/260	11	260	65 mm	125 N	6,8 g	10 pcs.	50 pcs.	1000 pcs.	
11134 - __	11/340	11	340	90 mm	125 N	8,5 g	10 pcs.	50 pcs.	1000 pcs.	
12858 - __	28/580	28	580	150 mm	340 N	53 g	10 pcs.	50 pcs.	300 pcs.	
12888 - __	28/880	28	880	250 mm	340 N	77 g	10 pcs.	50 pcs.	200 pcs.	

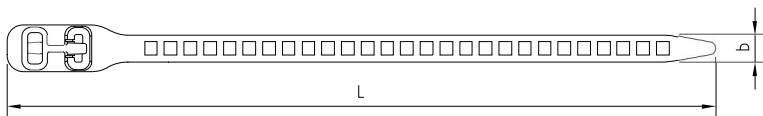


L ... length
b ... width
All dimensions in [mm]
Technical changes reserved


SoftTie® DL				properties			package size			color
order-no.	type	b	L	bundle Ø	min. force	weight	small	medium	large	
20718 - __	7/180	7	180	45 mm	56 N	2,2 g	10 pcs.	50 pcs.	1000 pcs.	
20726 - __	7/260	7	260	70 mm	56 N	2,9 g	10 pcs.	50 pcs.	1000 pcs.	
21126 - __	11/260	11	260	65 mm	125 N	6,8 g	10 pcs.	50 pcs.	1000 pcs.	
21134 - __	11/340	11	340	90 mm	125 N	8,5 g	10 pcs.	50 pcs.	1000 pcs.	
① 22842 - __	28/420	28	420	100 mm	340 N	41 g	10 pcs.	50 pcs.	320 pcs.	
22858 - __	28/580	28	580	150 mm	340 N	54 g	10 pcs.	50 pcs.	250 pcs.	
22888 - __	28/880	28	880	250 mm	340 N	76 g	10 pcs.	50 pcs.	180 Stk.	

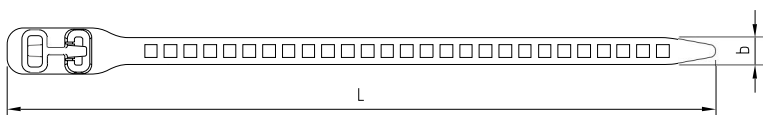

L ... length
b ... width
All dimensions in [mm]
Technical changes reserved


information
① TYPE 22842 only available in green !

SoftTie® C				properties			package size			color
order-no.	type	b	L	bundle Ø	min. force	weight	small	medium	large	
C1124 - __	11/240	11	240	65 mm	240 N	5,7 g	10 pcs.	50 pcs.	1000 pcs.	
C1132 - __	11/320	11	320	90 mm	240 N	7,5 g	10 pcs.	50 pcs.	1000 pcs.	



L ... length
b ... width
All dimensions in [mm]
Technical changes reserved

nomenclature

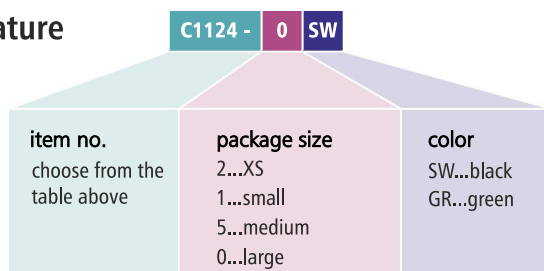

place your order

Send us the correct order-number according to our nomenclature to: sales@carova.at

